

V Series

Adhesive Melters: 8, 16, 30, and PUR 30 L



Exceeding expectations.

The **MELTON V Series** melters offer the best operation for the most demanding applications. Its design ensures easy access, maximum reliability, and minimal downtime for maintenance operations.

The **MELTON V Series** Melters:

- Reduce adhesive degradation
- User friendly operation
- Quick and easy installation



Optional air-tight opening and blowing system for PUR adhesives

User-friendly control panel with language free operator interface

Easy access for maintenance operation



Variable speed AC motor with VFD integrated control

Insulated control cabinet from heating area avoiding all possible overheating in electrical zone




External gear pump

Large opening with easy access for filling and maintenance



V Series

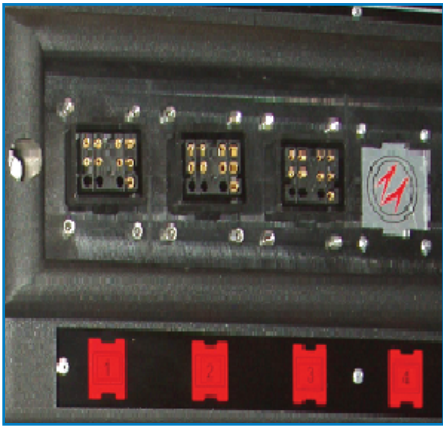

Up to 4 hose-gun connections.



Optional caster for easy moving.




Optional Rs485 connection with modbus protocol.

Technical Specifications

Unit Characteristics	V series units			
System	V8	V16	V30	V30 PUR
Tank Capacity (L):	8L	16L	30L	30L
Melting Capacity (Kg/h):	7.9	13.5	22.8	22.8
Max pumping capacity per pump (kg/h):	38.4	38.4	38.4	38.4
Max number of pumps:	1	2	2	2
Electrical connection:	220 I+T, 220III+T, 380III+N+T (50/60 Hz)			
Working viscosity (cps):	50000 cps			
Max working hydraulic pressure (bar):	80 bar			
Electrical consumption (W):	3800w	5600w	7200w	7200w

Max. channel power (W):	Channel 1 / Channel 2	Channel 3 / Channel 4
Per exit (hose and gun)	3000W	
Per channel (hose or gun)	2200W	1400W

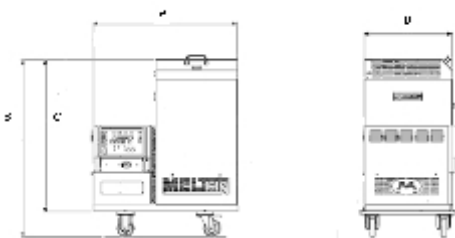

Dimensions (mm)	V8	V16		V30	
		1 pump	2 pump	1 pump	2 pump
A	806	906	906	906	906
B	670	730	780	892	942
C	530	590	640	752	802
D	445	445	566	445	566



For more information visit www.valcomelton.com, or contact your local representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel: 513.874.6550 • Fax: 513.874.3612 • info@meltonhotmelt.com

European Headquarters: Spain, Navarra • Tel: +34.948.321.580 • Fax: +34 948 326 584 • melton@melton.es

Asian Headquarters: China, Xiamen, Fujian • Tel: +86.592.591.7854 • Fax: +86.592.591.7834 • china@valcomelton.com

www.valcomelton.com • Serving Over 52 Countries Worldwide.

